

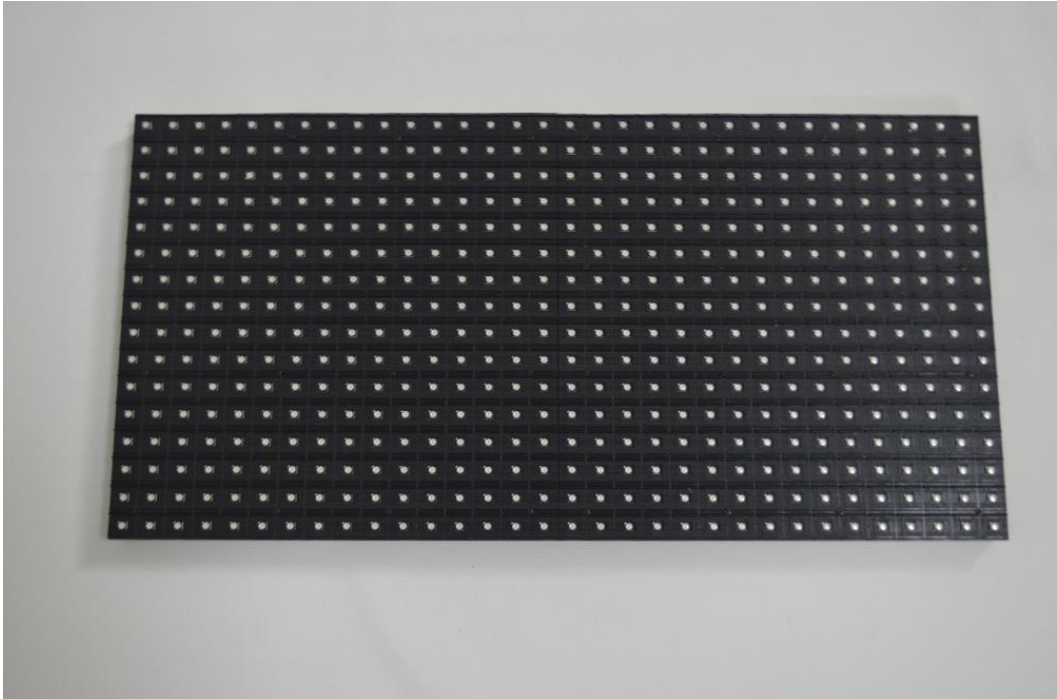


P10 Indoor 1/8 Scan 320*160mm LED Module

Specification

Model No.: **P10-I8S-SMD3528-32x16**

LED Lamp Specification					
					
Color	Package	Intensity	Viewing Angle	Wavelength	Testing Conditions
Red	SMD3528	300mcd	120°	622nm	25°C,20mA
Green		600mcd	120°	523nm	25°C,12mA
Blue		140mcd	120°	470nm	25°C,12mA
Module Photo					
					

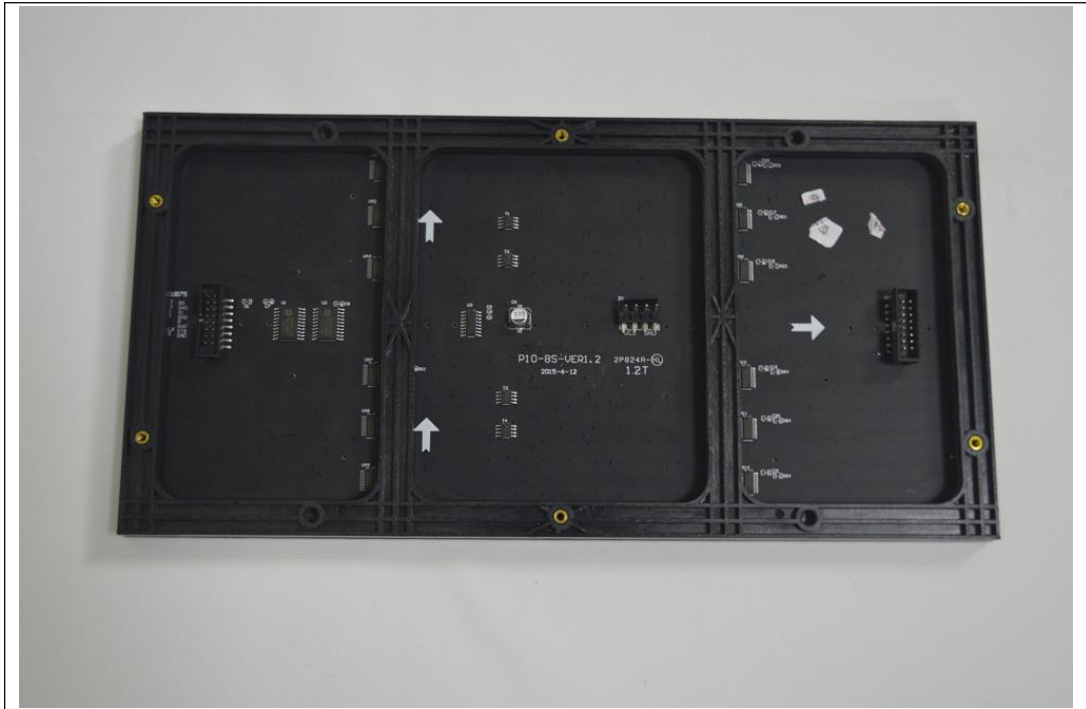

Module Parameter

Pixel Pitch	10mm
Pixel Configuration	SMD3528
Density	10,000 pixels/m ²
Module Resolution	32pixel(L) * 16pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 18mm(D)
Driving Mode	Constant current, 1/8 duty
Module Mask	Pure black mask---high contrast screen

Electricity Parameter

Optical Ratings	
Brightness	≥800 cd/m ²
Viewing Angle	120°(Horizontal); 120°(Vertical)
Best Viewing Distance	≥10m
Gray Grade	14 bits
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	13W

Control System	
Frame Frequency	≥60Hz
Refresh Frequency	≥1,920Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable); 20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable

Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
Reliability	
Working Temperature	-20~+60 °C
Storage Temperature	-30~+70 °C
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP31
Out-of-Control Pixel Rate	≤0.01%

Package



Tel: +86-755-32930690

Fax: +86-755-32930691

E-mail: manager@eagerled.com

Website: <http://www.eagerled.com>

Address: No.257, Shangwu Avenue, Tianxin Community, Shiyan Town, Bao'an District, Shenzhen, China 518108

